




## ENVIRO-GUARD FLUID KNOCKOUT STORAGE TANK



# THE FAV ENVIRO-GUARD SYSTEM

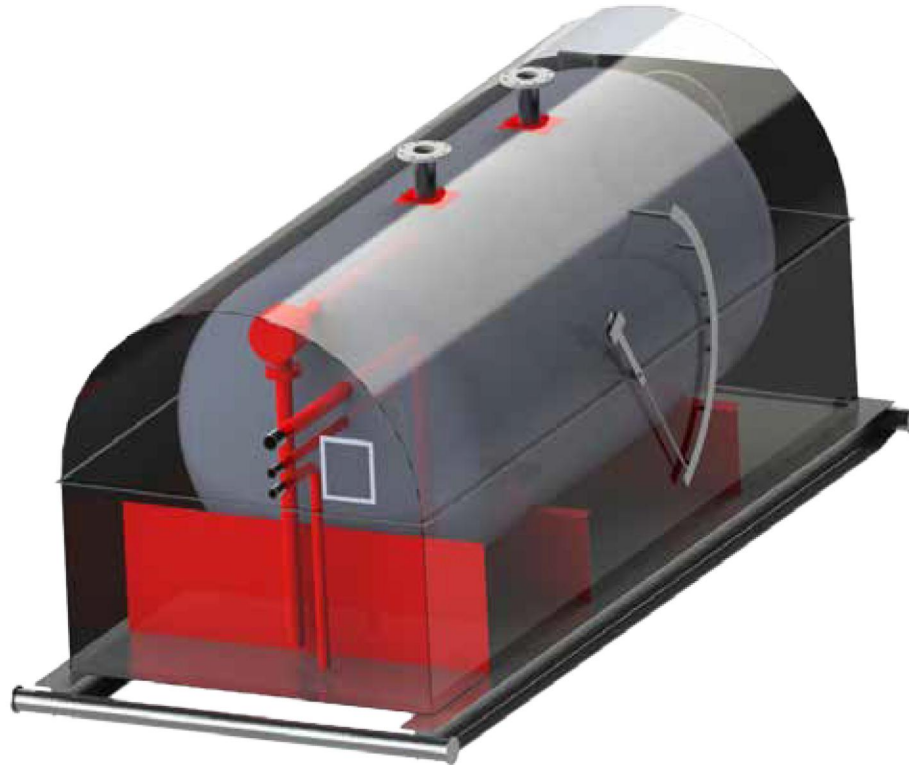

**Capacity available 60BBL, 115 BBL, 210 BBL**

Fav Systems Inc. has designed the Enviro-Guard System from ensures that liquids produced into main storage tank cannot be spilled onto the surrounding soil. The large secondary containment enclosure serves more than one purpose. It supports and secures the system on the ground because of the many square inches of contact area provided by the square base. It can be internally coated with urethane foam to insulate and keep the heat inside to eliminate freezing. All load lines and pop valve lines are housed inside also to prevent freezing. Liquid level indication is an easy to read stainless steel float assembly. There is a load line spill reservoir to catch fluids that may escape during hooking up hoses for loading purposes. The internal tank can be designed for 15 PSI to 250 PSI if required. The internal tank can be removed for inspection or repair if ever required. The internal tank can be internally coated if request.

**MULTIPLE USES SUCH AS: FLARE KNOCKOUT DRUMS, WELLHEAD PRODUCTION STORAGE, DEHYDRATADOR STILL COLUMN CONDENSER, FUEL STORAGE AND MORE.**

SPECIALIZED IN PREVENTING FUGITIVE EMISSIONS

Contact: 1 (956) 589 8832

[www.favsystems.com](http://www.favsystems.com)