





FLOW CAPACITY CURVE FOR PRISM SURE STOP  
**DETONATION FLAME ARRESTORS**  
 MODELS: ILSF-A DA, ILSF-B DA & ILNF-DA

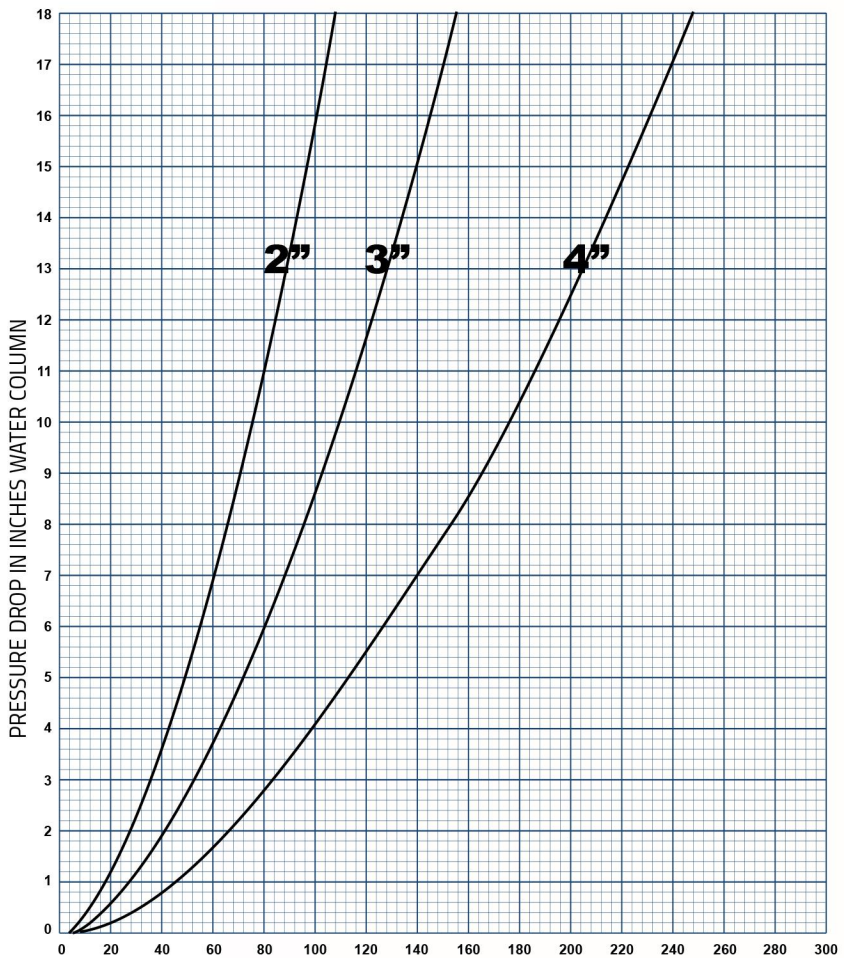

AIR FLOW IN STANDARD CUBIC FEET PER HOUR X 1,000

FLOW CAPACITY CURVE FOR FAV SYSTEMS INC. DETONATION FLAME ARRESTORS MODELS 2", 3" & 4" ILSF-A DA, ILSF-B DA OR ILNF-DA

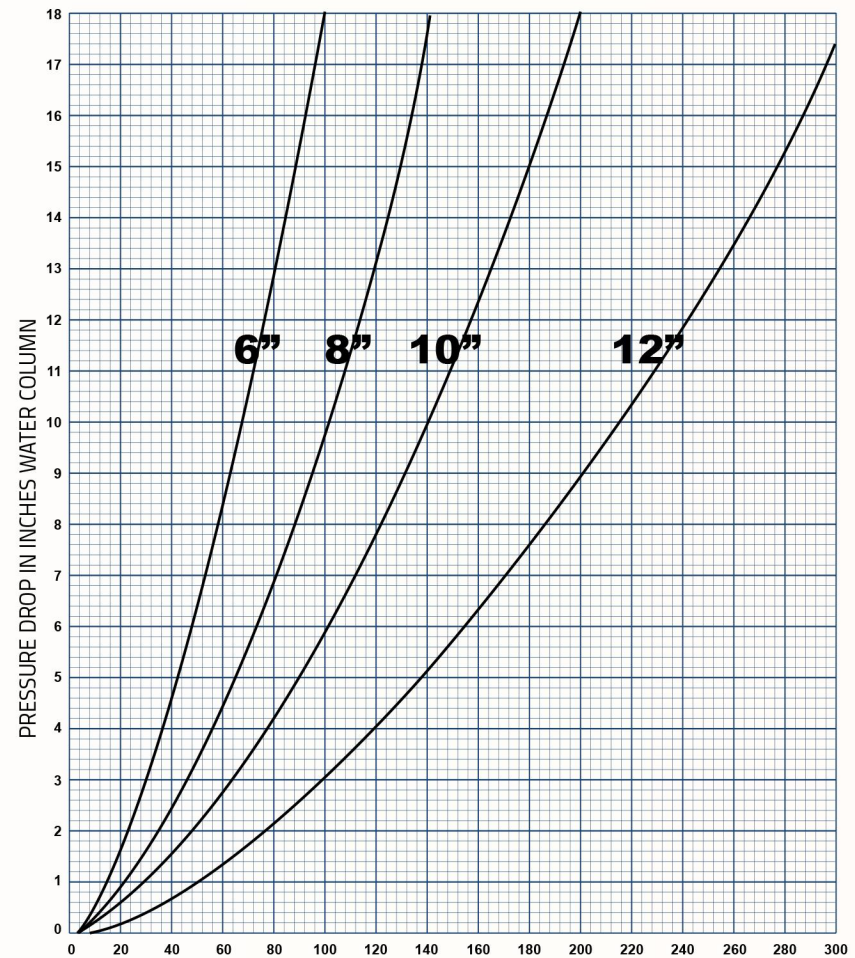

AIR FLOW IN STANDARD CUBIC FEET PER HOUR X 1,000

FLOW CAPACITY CURVE FOR FAV SYSTEMS INC. DETONATION FLAME ARRESTORS MODELS 6", 8", 10" & 12" ILSF-A DA, ILSF-B DA OR ILNF-DA

Ounces to Inches of Water Column - Multiply by 1.732

**QUALITY & REBIABILITY GUARANTEED**

Ounces to Inches of Water Column - Multiply by 1.732

SPECIALIZED IN PREVENTING FUGITIVE EMISSIONS

Contact: 1 (956) 589 8832

[www.favsystems.com](http://www.favsystems.com)